

Semiconductor (AC) fuses

Other Protistor® Fuses

Ferrule Fuses

27x60 URGD - 600 V to 690 VAC



EXTREMELY BREAKING CAPACITY RATING FUSES:
PROTECTION OF POWER SEMICONDUCTORS ACCORDING TO
IEC STANDARD 60269.1 AND 4

600 V - 690 V AC VOLTAGE RATING

aR- CLASS ACCORDING TO VDE 636-23 AND IEC 60269.4

Main Characteristics

Voltage rating U_N (VAC)	Class	Current rating I_N (A)	Pre-arcing I^2t @ 1 ms I^2t_p (A ² s)	Total clearing I^2t I^2t_t (A ² s)	Watts loss		Tested Breaking capacity
					0.8 I_N	I_N	
690 V	URGD	63	405	1840 @ 660 V	12	22	200 kA @ 690 V
		80	860	3750 @ 660 V	13.5	24.6	
		100	1620	6800 @ 660 V	15	27	
		125	3425	13600 @ 660 V	16	29.5	
		160	6480	24600 @ 660 V	17	32.5	
		200	13700	61500 @ 660 V	18.5	35.7	
600 V	URGD	250	29600	107000 @ 600 V	21	40	200 kA @ 600 V


Minimum operating voltage for trip-indicator: 20 V

Ref. Numbers

27x60 - With trip-indicator

Type	Voltage	Current rating	Designation	Ref. Number	Catalog Number
URGD	690 V	63 A	6.921 CP URGD 27x60/ 63	A076820	FR27UD69V63T
		80 A	6.921 CP URGD 27x60/ 80	B076821	FR27UD69V80T
		100 A	6.921 CP URGD 27x60/100	C076822	FR27UD69V100T
		125 A	6.921 CP URGD 27x60/125	D076823	FR27UD69V125T
		160 A	6.921 CP URGD 27x60/160	E076824	FR27UD69V160T
		200 A	6.921 CP URGD 27x60/200	F076825	FR27UD69V200T
URGD	600 V	250 A	621 CP URGD 27x60/250	W076264	FR27UD60V250T

Fuseholder Solution: See Gears and Fuse gears section

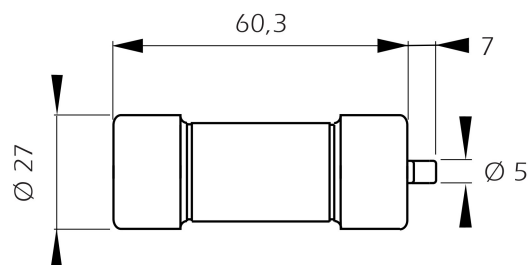



Semiconductor (AC) fuses

Other Protistor® Fuses

Ferrule Fuses

27x60 URGD - 600 V to 690 VAC


Time vs current characteristics

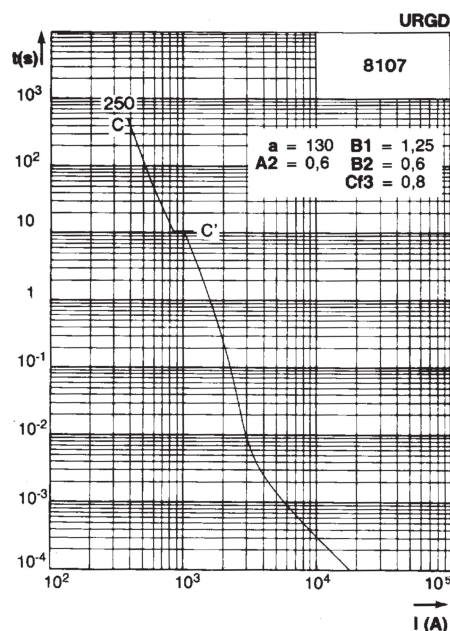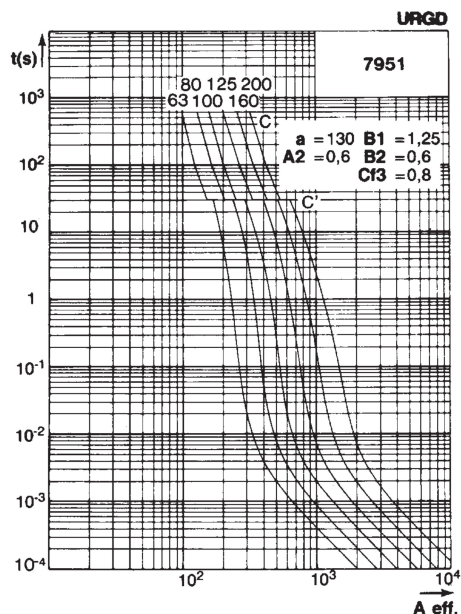


Tolerance for mean pre-arcing current $\pm 8\%$

These curves indicate, for each rated current, pre-arcing time vs. R.M.S. pre-arcing current.


Corrective factor

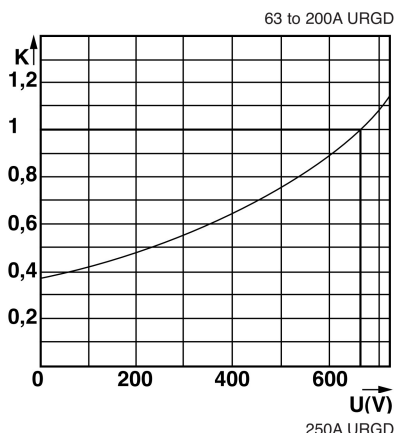

Left: Mean curves showing variation of total clearing time ($I^2 t_t$) and the total clearing duration t_t as a function of the operating voltage U

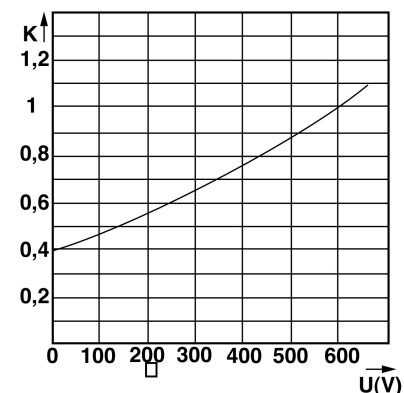

Peak arc voltage

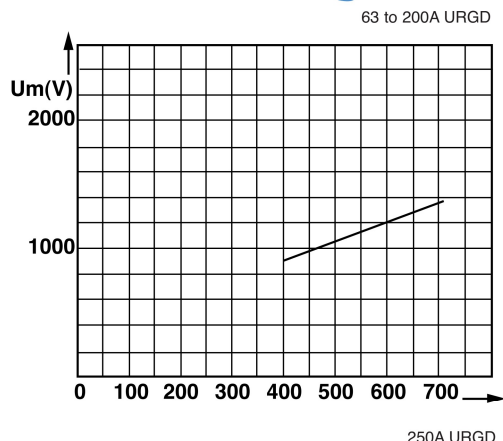

Left: Curves show peak value U_m of arc voltage which appears across the fuse-link as a function of operating voltage U @ $\cos \varphi = 0.15$.

